



MKV FITTING INSTRUCTIONS

IMPORTANT NOTE FOR FITTER –

PLEASE ENSURE “INSTRUCTIONS FOR USE” BOOKLET IS WITH THE VEHICLE

It is recommended that ShuRoo be fitted by a qualified auto electrician.


Mount the ShuRoo unit on the front of the vehicle, parallel with the road surface. Any obstruction of sound flow will radically decrease the unit’s effectiveness, i.e it MUST protrude IN FRONT of the bull bar uprights when fitted.

Ensure wiring with the in-line fuse is connected to RELIABLE, ACCESSORIES power supply (*see note below).

Ensure that ShuRoo is earthed through the negative of the battery.

ShuRoo requires an operating voltage of 12-16 volts DC.

WARNING: Operating voltages over 16 volts DC will cause irreparable damage to the ShuRoo unit. Any damage caused by operating voltages over 16 volts DC is easily recognizable by the ShuRoo service department and will not be covered under warranty.

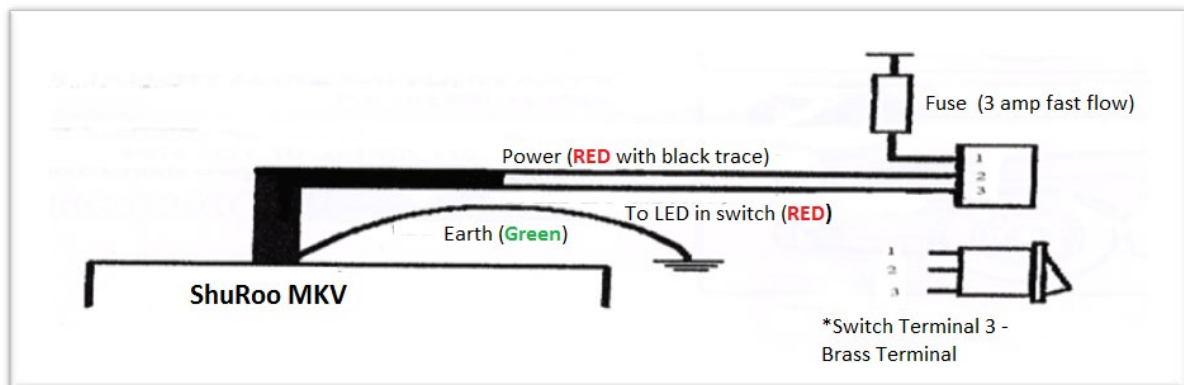

With correct installation, ignition on the dash switch will be activated, ShuRoo will emit a crisp audible “zip zip” sound and the dash light will be steadily illuminated (or flashing) if not illuminated there may be an issue with the wiring or unit.

Standing in front of the ShuRoo for extended periods with the unit operating is not recommended.

Units with a 2 Pin Switch need to be wired up as follows: PIN 1 – Power OUT PIN 2- Power IN. There is no LED wiring needs for units with these switches. Please disregard the third wire when supplied with the 2 pin Switch.

Installations and technical enquiries call- 1800 671 759

Email: mail@shuroo.com